


# CG 200 P SERIES SPIRAL CABLE GLAND

## PG thread

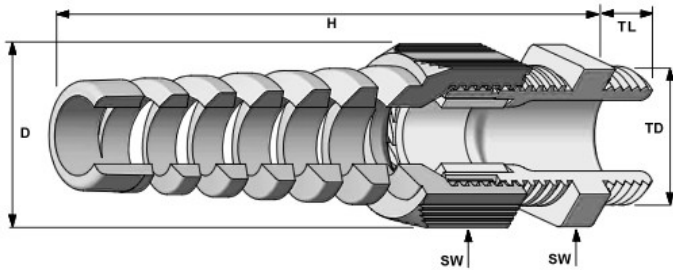

Strain relief gland offering maximum protection against conductor fatigue caused by flexing cables.

Technical Data:	
Material	Polyamide 6
Seal	Chloroprene (CR)
Color	RAL 7001 (Gray)
	RAL 9005 (Black)
Protection Class	IP 68 - 5 Bar
Temperature Range	- 20°C to +100°C permanent
	- 30°C to +150°C intermittent
Flammability	V2 (According to UL 94)

Part Number		Thread Size	Clamping Range $\phi$ (min-max)		Thread Diameter (TD)		Wrenching Flats (SW)		Thread Length inches	Height (H) inches
Gray	Black		inches	mm	inches	mm	inches	mm		
<b>PG</b>										
FPG-7	FPB-7	PG 7	.118 - .256	3.0 - 6.5	0.492	12.5	0.591	15.0	0.315	2.165
FPG-9	FPB-9	PG 9	.157 - .315	4.0 - 8.0	0.598	15.2	0.748	19.0	0.315	2.598
FPG-11	FPB-11	PG 11	.197 - .394	5.0 - 10.0	0.732	18.6	0.866	22.0	0.315	3.110
FPG-13	FPB-13	PG 13.5	.236 - .472	6.0 - 12.0	0.803	20.4	0.945	24.0	0.355	3.740
FPG-16	FPB-16	PG 16	.394 - .551	10.0 - 14.0	0.886	22.5	1.063	27.0	0.394	4.134
FPG-21	FPB-21	PG 21	.512 - .709	13.0 - 18.0	1.114	28.3	1.299	33.0	0.433	4.646
<b>PG with Reducer Bushing</b>										
FPG-7R	FPB-7R	PG 7	.079 - .197	2.0 - 5.0	0.492	12.5	0.591	15.0	0.315	2.165
FPG-9R	FPB-9R	PG 9	.079 - .236	2.0 - 6.0	0.598	15.2	0.748	19.0	0.315	2.598
FPG-11R	FPB-11R	PG 11	.118 - .276	3.0 - 7.0	0.732	18.6	0.866	22.0	0.315	3.110
FPG-13R	FPB-13R	PG 13.5	.197 - .354	5.0 - 9.0	0.803	20.4	0.945	24.0	0.355	3.740
FPG-16R	FPB-16R	PG 16	.276 - .472	7.0 - 12.0	0.886	22.5	1.063	27.0	0.394	4.134
FPG-21R	FPB-21R	PG 21	.354 - .630	9.0 - 16.0	1.114	28.3	1.299	33.0	0.433	4.646

UL and CSA approvals in process