


# ACCESSORIES

## PLASTIC LOCKNUTS: Metric, PG & NPT thread

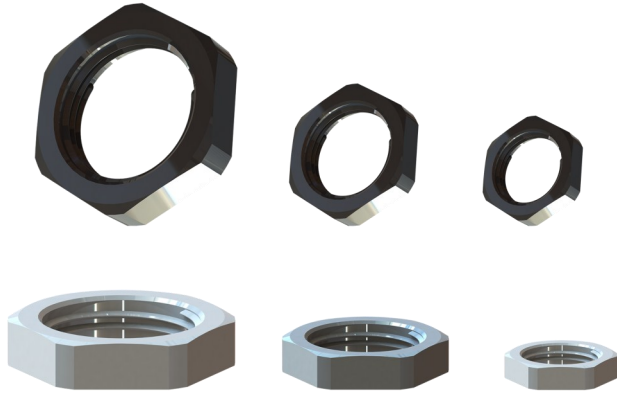

Hexagonal Lock Nuts of polyamide, glass fiber reinforced.

### Technical Data:

Material	Polyamide 6 (30% Glass Fiber reinforced)
Seal	Chloroprene (CR)
Color	RAL 7001 (Gray)
	RAL 9005 (Black)
Temperature Range	- 20°C to +100°C permanent
	- 30°C to +150°C intermittent
Flammability	V2 (According to UL 94)

Part Number		Thread Size	Height		Diameter		Wrenching Flats	
Gray	Black		inches	mm	inches	mm	inches	mm
<b>Metric</b>								
LMG-12	LMB-12	M12x1.5	0.197	5.0	0.768	19.5	0.709	18.0
LMG-16	LMB-16	M16x1.5	0.197	5.0	0.953	24.2	0.866	22.0
LMG-20	LMB-20	M20x1.5	0.236	6.0	1.126	28.6	1.024	26.0
LMG-25	LMB-25	M25x1.5	0.236	6.0	1.378	35.0	1.260	32.0
LMG-32	LMB-32	M32x1.5	0.276	7.0	1.815	46.1	1.614	41.0
LMG-40	LMB-40	M40x1.5	0.276	7.0	2.177	55.3	1.969	50.0
LMG-50	LMB-50	M50x1.5	0.315	8.0	2.602	66.1	2.362	60.0
LMG-63	LMB-63	M63x1.5	0.315	8.0	3.248	82.5	2.953	75.0
<b>PG</b>								
LPG-7	LPB-7	PG 7	0.197	5.0	0.827	21.0	0.748	19.0
LPG-9	LPB-9	PG 9	0.197	5.0	0.945	24.0	0.866	22.0
LPG-11	LPB-11	PG 11	0.197	5.0	1.024	26.0	0.945	24.0
LPG-13	LPB-13	PG 13.5	0.236	6.0	1.142	29.0	1.063	27.0
LPG-16	LPB-16	PG 16	0.236	6.0	1.299	33.0	1.181	30.0
LPG-21	LPB-21	PG 21	0.276	7.0	1.535	39.0	1.417	36.0
LPG-29	LPB-29	PG 29	0.276	7.0	1.969	50.0	1.811	46.0
LPG-36	LPB-36	PG 36	0.315	8.0	2.598	66.0	2.362	60.0
LPG-42	LPB-42	PG 42	0.315	8.0	2.874	73.0	2.559	65.0
LPG-48	LPB-48	PG 48	0.315	8.0	3.071	78.0	2.756	70.0
<b>NPT</b>								
LNG-3/8	LNB-3/8	NPT 3/8	0.197	5.0	0.984	25.0	0.866	22.0
LNG-1/2	LNB-1/2	NPT 1/2	0.197	5.0	1.201	30.5	1.063	27.0
LNG-3/4	LNB-3/4	NPT 3/4	0.197	5.0	1.476	37.5	1.299	33.0
LNG-1	LNB-1	NPT 1	0.236	6.0	1.831	46.5	1.850	47.0