


CG 200 M SERIES SPIRAL CABLE GLAND

Metric thread

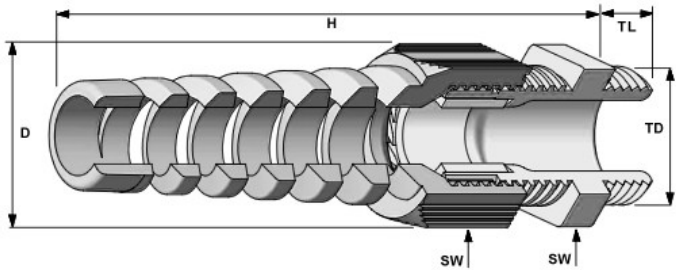

Technical Data:

Material	Polyamide 6
Seal	Chloroprene (CR)
Color	RAL 7001 (Gray)
	RAL 9005 (Black)
Protection Class	IP 68 - 5 Bar
Temperature Range	- 20°C to +100°C permanent
	- 30°C to +150°C intermittent
Flammability	V2 (According to UL 94)
Approvals	UL, UR, CSA

Strain relief gland offering maximum protection against conductor fatigue caused by flexing cables.

Part Number		Thread Size	Clamping Range ϕ (min-max)		Thread Diameter (TD)		Wrenching Flats (SW)		Thread Length	Height (H)	UL ¹
Gray	Black		inches	mm	inches	mm	inches	mm			
Metric											
FMG-12	FMB-12	M12x1.5	.118 - .256	3.0 - 6.5	0.472	12.0	0.591	15.0	0.315	2.165	UR
FMG-16	FMB-16	M16x1.5	.197 - .394	5.0 - 10.0	0.630	16.0	0.866	22.0	0.394	3.110	UR
FMG-16L	FMB-16L	M16x1.5	.197 - .394	5.0 - 10.0	0.630	16.0	0.866	22.0	0.591	3.110	-
FMG-20	FMB-20	M20x1.5	.236 - .472	6.0 - 12.0	0.787	20.0	0.945	24.0	0.394	3.740	UL
FMG-20L	FMB-20L	M20x1.5	.236 - .472	6.0 - 12.0	0.787	20.0	0.945	24.0	0.591	3.740	-
FMG-20	FMB-20	M20x1.5	.394 - .551	10.0 - 14.0	0.787	20.0	1.063	27.0	0.394	4.134	UL
FMG-20CL	FMB-20CL	M20x1.5	.394 - .551	10.0 - 14.0	0.787	20.0	1.063	27.0	0.591	4.134	UL
FMG-25	FMB-25	M25x1.5	.512 - .709	13.0 - 18.0	0.984	25.0	1.299	33.0	0.394	4.646	UL
FMG-25L	FMB-25L	M25x1.5	.512 - .709	13.0 - 18.0	0.984	25.0	1.299	33.0	0.591	4.646	-
Metric with Reducer Bushings											
FMG-12R	FMB-12R	M12x1.5	.079 - .197	2.0 - 5.0	0.472	12.0	0.591	15.0	0.315	2.165	-
FMG-16R	FMB-16R	M16x1.5	.118 - .276	3.0 - 7.0	0.630	16.0	0.866	22.0	0.394	3.110	-
FMG-16RL	FMB-16RL	M16x1.5	.118 - .276	3.0 - 7.0	0.630	16.0	0.866	22.0	0.591	3.110	-
FMG-20R	FMB-20R	M20x1.5	.197 - .354	5.0 - 9.0	0.787	20.0	0.945	24.0	0.394	3.740	-
FMG-20RL	FMB-20RL	M20x1.5	.197 - .354	5.0 - 9.0	0.787	20.0	0.945	24.0	0.591	3.740	-
FMG-20R	FMB-20R	M20x1.5	.276 - .472	7.0 - 12.0	0.787	20.0	1.063	27.0	0.394	4.134	-
FMG-20RCL	FMB-20RCL	M20x1.5	.276 - .472	7.0 - 12.0	0.787	20.0	1.063	27.0	0.591	4.134	-
FMG-25R	FMB-25R	M25x1.5	.354 - .551	9.0 - 14.0	0.984	25.0	1.299	33.0	0.394	4.646	-
FMG-25RL	FMB-25RL	M25x1.5	.354 - .551	9.0 - 14.0	0.984	25.0	1.299	33.0	0.591	4.646	-

"L" indicates Longer Thread

¹Additional UL approvals in process