


# LIQUID TIGHT CONDUIT FITTINGS (FEMALE)

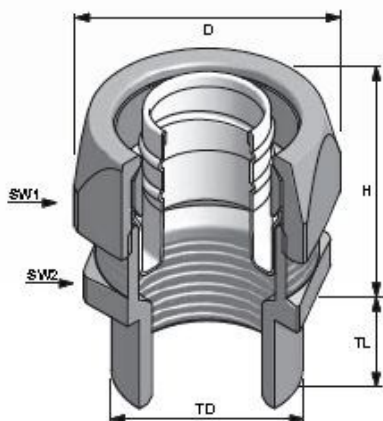

## Technical data:

Material	Brass, Nickel Plated
Seal Ring	Polyamide 6 V2
Protection Bushing	Polyamide 6 V2
Ferrule	Brass nickel plated or Steel zinc plated
Protection Class	IP68 - 5 Bar
Oper. Temperature	-45°C to +105°C permanent
O-Ring	NBR
Construction	Piece fitting (counter nut, seal ring, ferrule and body) The counternut and body are made of nickel-plated brass, the ferrule is plated steel (size 3/8" till 1") or nickel plated brass (other sizes). The insert and the sealing are made of Polyamide.

Codes	Size	For sealtite size	Max. internal diameter (mm)	H (mm)	TL (mm)	ØD (mm)	SW1 (mm)	SW2 (mm)
<b>Metric female fitting (red insert)</b>								
BBFM-02 (S) F	M24x1,5/M16	M16X1,5	5/16"	8,3	24,5	11,5	29,0	26,0
BBFM-02 F	M24x1,5/M16	M16X1,5	3/8"	10,2	23,5	11,5	29,0	26,0
BBFM-03 F	M27x1,5/M20	M20X1,5	1/2"	13,5	24,0	13,0	32,7	29,0
BBFM-04 F	M33x1,5/M25	M25X1,5	3/4"	18,5	25,0	15,0	38,7	35,0
BBFM-05 F	M42x1,5/M32	M32X1,5	1"	23,5	31,5	15,0	50,0	45,0
BBFM-06 F	M50x1,5/M40	M40X1,5	1 1/4"	31,8	36,0	16,0	60,0	54,0
BBFM-07 F	M58x1,5/M50	M50X1,5	1 1/2"	36,8	38,5	18,0	69,3	63,0
BBFM-08 F	M72x2,0/M63	M63X1,5	2"	47,8	46,0	20,0	85,0	77,0
<b>PG female fitting (blue insert)</b>								
BBFB-03 (S) F	M24x1,5/Pg11	11	5/16"	8,3	24,5	11,5	29,0	26,0
BBFB-03 F	M24x1,5/Pg11	11	3/8"	10,9	23,0	11,5	29,0	26,0
BBFB-04 F	M24x1,5/Pg13,5	13,5	3/8"	10,9	25,0	11,5	29,0	26,0
BBFB-05 F	M27x1,5/Pg16	16	1/2"	13,5	27,0	13,0	32,7	29,0
BBFB-06 F	M33x1,5/Pg21	21	3/4"	18,5	30,0	16,0	38,7	35,0
BBFB-07 F	M42x1,5/Pg29	29	1"	23,5	34,0	20,0	50,0	45,0
BBFB-08 F	M50x1,5/Pg36	36	1 1/4"	31,8	36,0	16,0	60,0	54,0
BBFB-09 F	M58x1,5/Pg42	42	1 1/2"	36,8	38,5	18,0	69,3	63,0
BBFB-10 F	M72x2,0/Pg48	48	2"	47,8	46,0	20,0	85,0	77,0
<b>NPT female fitting (white insert)</b>								
BBFN-01 F	M24x1,5/Npt1/2	1/2"	5/16"	8,3	24,0	13,0	29,0	26,0
BBFN-02 (S) F	M24x1,5/Npt1/2	1/2"	3/8"	10,9	22,5	13,0	29,0	26,0
BBFN-02 F	M27x1,5/Npt1/2	1/2"	1/2"	13,5	24,0	13,0	32,7	29,0
BBFN-03 F	M33x1,5/Npt3/4	3/4"	3/4"	18,5	25,0	15,0	38,7	35,0
BBFN-04 F	M42x1,5/Npt1	1"	1"	23,5	31,0	15,0	50,0	45,0
BBFN-05 F	M50x1,5/Npt5/4	1 1/4"	1 1/4"	31,8	35,5	16,0	60,0	54,0
BBFN-06 F	M58x1,5/Npt3/2	1 1/2"	1 1/2"	36,8	38,0	18,0	69,3	63,0
BBFN-07 F	M72x2,0/Npt2	2"	2"	47,8	44,5	20,0	85,0	77,0

7

Various colors, materials, and sizes available upon request

Email: [info@sabcable.com](mailto:info@sabcable.com)



Website: [www.sabcable.com](http://www.sabcable.com)