


LIQUID TIGHT CONDUIT FITTINGS (90°)

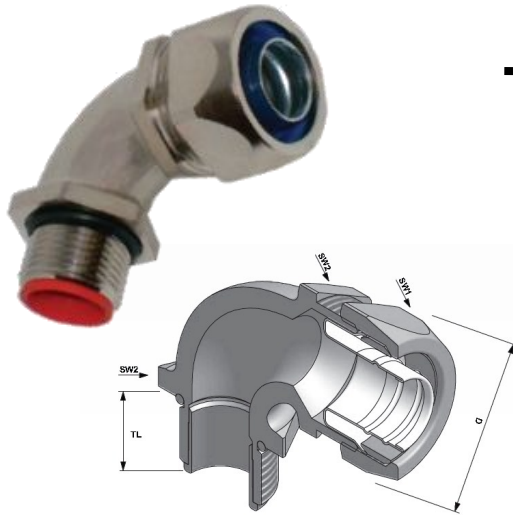

Technical data:

| | |
|--------------------|---|
| Material | Brass, Nickel Plated |
| Seal Ring | Polyamide 6 V2 |
| Protection Bushing | Polyamide 6 V2 |
| Ferrule | Brass nickel plated or Steel zinc plated |
| Protection Class | IP68 - 5 Bar |
| Oper. Temperature | -45°C to +105°C permanent |
| O-Ring | NBR |
| Construction | Piece fitting (counter nut, seal ring, ferrule and body) The counternut and body are made of nickel-plated brass, the ferrule is plated steel (size 3/8" till 1") or nickel plated brass (other sizes). The insert and the sealing are made of Polyamide. |

| Codes | Size | For sealtite size | Max. internal diameter (mm) | TL (mm) | ØD (mm) | SW1 (mm) | SW2 (mm) |
|--|----------------|-------------------|-----------------------------|---------|---------|----------|----------|
| Metric 90° fitting (red insert) | | | | | | | |
| BBFM-02 (S) 90 | M24x1,5/M16 | M16X1,5 | 5/16" | 8,3 | 11,5 | 29,0 | 26,0 |
| BBFM-02 90 | M24x1,5/M16 | M16X1,5 | 3/8" | 10,2 | 11,5 | 29,0 | 26,0 |
| BBFM-03 (S) 90 | M24x1,5/M20 | M20X1,5 | 3/8" | 10,2 | 13,0 | 29,0 | 26,0 |
| BBFM-03 90 | M27x1,5/M20 | M20X1,6 | 1/2" | 13,5 | 13,0 | 32,7 | 29,0 |
| BBFM-04 90 | M33x1,5/M25 | M25X1,5 | 3/4" | 18,5 | 15,0 | 38,7 | 35,0 |
| BBFM-05 90 | M42x1,5/M32 | M32X1,5 | 1" | 23,5 | 15,0 | 50,0 | 45,0 |
| BBFM-06 90 | M50x1,5/M40 | M40X1,5 | 1 1/4" | 31,8 | 16,0 | 60,0 | 54,0 |
| BBFM-07 90 | M58x1,5/M50 | M50X1,5 | 1 1/2" | 36,8 | 18,0 | 69,3 | 63,0 |
| BBFM-08 90 | M72x2,0/M63 | M63X1,5 | 2" | 47,8 | 20,0 | 85,0 | 77,0 |
| PG 90° fitting (blue insert) | | | | | | | |
| BBFB-03 (S) 90 | M24x1,5/Pg11 | 11 | 5/16" | 8,3 | 11,5 | 29,0 | 26,0 |
| BBFB-03 90 | M24x1,5/Pg11 | 11 | 3/8" | 10,2 | 11,5 | 29,0 | 26,0 |
| BBFB-04 90 | M24x1,5/Pg13,5 | 13,5 | 3/8" | 10,2 | 11,5 | 29,0 | 26,0 |
| BBFB-05 90 | M27x1,5/Pg16 | 16 | 1/2" | 13,5 | 13,0 | 32,7 | 29,0 |
| BBFB-06 90 | M33x1,5/Pg21 | 21 | 3/4" | 18,5 | 15,0 | 38,7 | 35,0 |
| BBFB-07 90 | M42x1,5/Pg29 | 29 | 1" | 23,5 | 15,0 | 50,0 | 45,0 |
| BBFB-08 90 | M50x1,5/Pg36 | 36 | 1 1/4" | 31,8 | 16,0 | 60,0 | 54,0 |
| BBFB-09 90 | M58x1,5/Pg42 | 42 | 1 1/2" | 36,8 | 18,0 | 69,3 | 63,0 |
| BBFB-10 90 | M72x2,0/Pg48 | 48 | 2" | 47,8 | 20,0 | 85,0 | 77,0 |
| NPT 90° fitting (white insert) | | | | | | | |
| BBFN-01 90 | M24x1,5/Npt1/2 | 1/2" | 5/16" | 8,3 | 13,0 | 29,0 | 26,0 |
| BBFN-02 (S) 90 | M24x1,5/Npt1/2 | 1/2" | 3/8" | 10,2 | 13,0 | 29,0 | 26,0 |
| BBFN-02 90 | M27x1,5/Npt1/2 | 1/2" | 1/2" | 13,5 | 13,0 | 32,7 | 29,0 |
| BBFN-03 90 | M33x1,5/Npt3/4 | 3/4" | 3/4" | 18,5 | 15,0 | 38,7 | 35,0 |
| BBFN-04 90 | M42x1,5/Npt1 | 1" | 1" | 23,5 | 15,0 | 50,0 | 45,0 |
| BBFN-05 90 | M50x1,5/Npt5/4 | 1 1/4" | 1 1/4" | 31,8 | 16,0 | 60,0 | 54,0 |
| BBFN-06 90 | M58x1,5/Npt3/2 | 1 1/2" | 1 1/2" | 36,8 | 18,0 | 69,3 | 63,0 |
| BBFN-07 90 | M72x2,0/Npt2 | 2" | 2" | 47,8 | 20,0 | 85,0 | 77,0 |

5

Various colors, materials, and sizes available upon request

Email: info@sabcable.com



Continued on next page

Website: www.sabcable.com