


# LIQUID TIGHT CONDUIT FITTINGS (45°)

## Technical data:

Material	Brass, Nickel Plated
Seal Ring	Polyamide 6 V2
Protection Bush-	Polyamide 6 V2
Ferrule	Brass nickel plated or Steel zinc plated
Protection Class	IP68 - 5 Bar
Oper. Temperature	-45°C to +105°C permanent
O-Ring	NBR
Construction	Piece fitting (counter nut, seal ring, ferrule and body) The counter nut and body are made of nickel-plated brass, the ferrule is plated steel (size 3/8" till 1") or nickel plated brass (other sizes). The insert and the sealing are made of Polyamide.

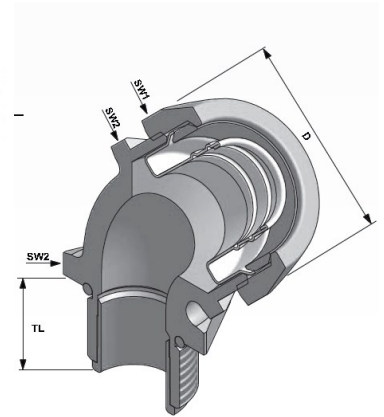

Codes	Size	For sealtite size	Max. internal diameter (mm)	TL (mm)	ØD (mm)	SW1 (mm)	SW2 (mm)
<b>Metric 45° fitting (red insert)</b>							
BBFM-02 (S) 45	M24x1,5/M16	M16X1,5	5/16"	8,3	11,5	29,0	26,0
BBFM-02 45	M24x1,5/M16	M16X1,5	3/8"	10,2	11,5	29,0	26,0
BBFM-03 (S) 45	M24x1,5/M20	M20X1,5	3/8"	10,2	13,0	29,0	26,0
BBFM-03 45	M27x1,5/M20	M20X1,6	1/2"	13,5	13,0	32,7	29,0
BBFM-04 45	M33x1,5/M25	M25X1,5	3/4"	18,5	15,0	38,7	35,0
BBFM-05 45	M42x1,5/M32	M32X1,5	1"	23,5	15,0	50,0	45,0
BBFM-06 45	M50x1,5/M40	M40X1,5	1 1/4"	31,8	16,0	60,0	54,0
BBFM-07 45	M58x1,5/M50	M50X1,5	1 1/2"	36,8	18,0	69,3	63,0
BBFM-08 45	M72x2,0/M63	M63X1,5	2"	47,8	20,0	85,0	77,0
<b>PG 45° fitting (blue insert)</b>							
BBFB-03 (S) 45	M24x1,5/Pg11	11	5/16"	8,3	11,5	29,0	26,0
BBFB-03 45	M24x1,5/Pg11	11	3/8"	10,2	11,5	29,0	26,0
BBFB-04 45	M24x1,5/Pg13,5	13,5	3/8"	10,2	11,5	29,0	26,0
BBFB-05 45	M27x1,5/Pg16	16	1/2"	13,5	13,0	32,7	29,0
BBFB-06 45	M33x1,5/Pg21	21	3/4"	18,5	15,0	38,7	35,0
BBFB-07 45	M42x1,5/Pg29	29	1"	23,5	15,0	50,0	45,0
BBFB-08 45	M50x1,5/Pg36	36	1 1/4"	31,8	16,0	60,0	54,0
BBFB-09 45	M58x1,5/Pg42	42	1 1/2"	36,8	18,0	69,3	63,0
BBFB-10 45	M72x2,0/Pg48	48	2"	47,8	20,0	85,0	77,0
<b>NPT 45° fitting (white insert)</b>							
BBFN-01 45	M24x1,5/Npt1/2	1/2"	5/16"	8,3	13,0	29,0	26,0
BBFN-02 (S) 45	M24x1,5/Npt1/2	1/2"	3/8"	10,2	13,0	29,0	26,0
BBFN-02 45	M27x1,5/Npt1/2	1/2"	1/2"	13,5	13,0	32,7	29,0
BBFN-03 45	M33x1,5/Npt3/4	3/4"	3/4"	18,5	15,0	38,7	35,0
BBFN-04 45	M42x1,5/Npt1	1"	1"	23,5	15,0	50,0	45,0
BBFN-05 45	M50x1,5/Npt5/4	1 1/4"	1 1/4"	31,8	16,0	60,0	54,0
BBFN-06 45	M58x1,5/Npt3/2	1 1/2"	1 1/2"	36,8	18,0	69,3	63,0
BBFN-07 45	M72x2,0/Npt2	2"	2"	47,8	20,0	85,0	77,0

3

Various colors, materials, and sizes available upon request

Email: [info@sabcable.com](mailto:info@sabcable.com)



Website: [www.sabcable.com](http://www.sabcable.com)